


## 1. INITIAL SETUP


### RECOMMENDED SETUP








### OTHER SETUP OPTIONS




The Locating Tab may be oriented at 90° positions as needed to align the graver top with the EasyGraver Sharpening Fixture top.

### 2. GUIDE HOLE POSITIONS EXPLAINED



Guide Hole Positions (viewed from top of EasyGraver®).



Corresponding Graver Surfaces (viewed from graver bottom).


For reference, use **FIG. 2.1** and **FIG. 2.2**. Each guide hole is numbered to correspond with the surface it produces.

Guide Hole #1: Reshaping Grind Guide Hole #2: Reshaping Grind Guide Hole #3: Heel Grind Guide Hole #4: Heel Grind Guide Hole #5: Face

	Product #003-700	Product #003-701
V-angle	120°	105°
Heels	~ 108°	~ 90°
Face	Slightly < 50°	Slightly < 50°

### 3. HOW TO USE

### V-ANGLE RESHAPING: HOLES #1 AND #2

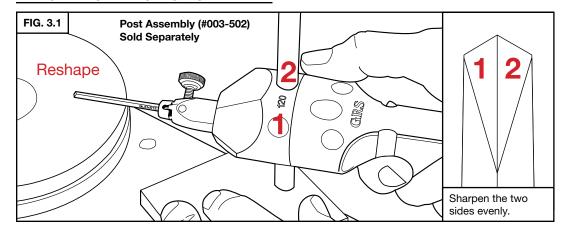


#### NOTE:

After the graver is shaped using holes #1 and #2, these holes may be skipped until the graver becomes short enough to need reshaping.


If the graver is removed from the QC Tool Holder and reinstalled back into that particular holder or another one, the user should always reshape the graver bottom using holes #1 and #2. For greatest efficiency, it is always recommended to leave the graver in the same QC Tool Holder for its entire working life.

## 3. HOW TO USE (continued)


## HEELS: HOLES #3 AND #4

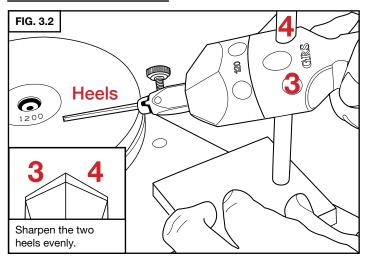


## FACE: HOLE #5

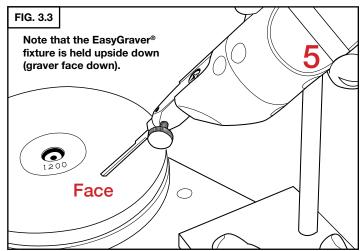


### REDUCING THE GRAVER TOP






# Choose an Option:


Faceted Top: See OPTION 1 (FIG 3.8)




Flat Top: See OPTION 2 (FIG 3.9-10)




**OPTION 1: Faceted Graver Top** 

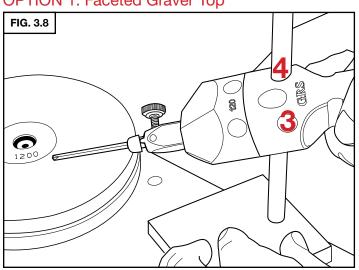

OPTION 2: Flat Graver Top

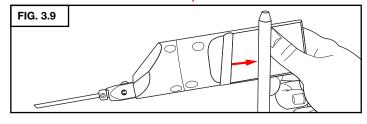

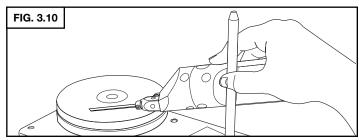

# GLENDO LLC

900 Overlander Road • Emporia, KS 66801 USA 800-835-3519 • 620-343-1084 • Fax: 620-343-9640 grs@grstools.com • www.grstools.com

Last Updated: 2015-07-13